



# Aluminum Full View Doors

Amarr® 3552 / Amarr® 3502







**Amarr 3552 and 3502 Aluminum Full View doors** are constructed of 2" thick extruded aluminum rails and stiles and can be fitted with a variety of full-view glass options, solid aluminum, perforated or louvered ventilation panels. Perfect for automotive showrooms and repair centers, service stations, car washes, fire houses, restaurants, and sports complexes; our aluminum doors create a clean style for any facility. These doors can be mounted stationary or operative as a stylish alternative for al fresco situations. The **ClearView Aluminum Strut System** provides added strength and durability to larger Amarr 3552 door sizes up to 24' 2", without restricting the viewing area.



Amarr 3552 with two Louvered Aluminum bottom sections.

## CONSTRUCTION

### Amarr 3552


#### Heavy-Duty Aluminum door

- 2" thick extruded aluminum rails & stiles
- Available in 1" width increments
- Available in odd heights

### Amarr 3502

#### Medium-Duty Aluminum door

- 2" thick extruded aluminum rails & stiles
- Available in 1" width increments

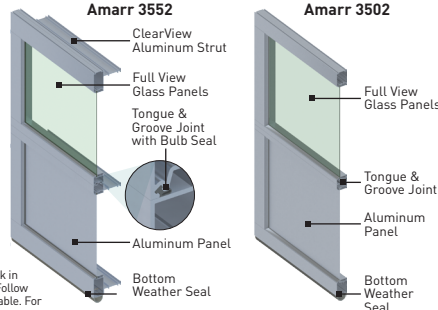

**Track:** All Amarr doors are available with both 2" or 3" track in Standard Lift, High Lift, Vertical Lift, Low Headroom, and Follow the Roof Pitch. Custom track configurations are also available. For drawings and more information, please visit [www.amarr.com](http://www.amarr.com).

**Springs:** Torsion springs are oil tempered, helical wound and custom computed for each door for a minimum 10,000 cycle life. Optional springs are available up to 100,000 cycle life.

**Standard Hardware:** Galvanized steel hinges and track brackets. All rollers have minimum 10-ball bearings.

## SPECIFICATIONS

	Heavy-Duty <b>Amarr 3552</b>	Medium-Duty <b>Amarr 3502</b>
<b>MATERIAL</b>	Aluminum	Aluminum
<b>CONSTRUCTION LAYERS</b>	Single	Single
<b>GASKET SEAL</b>	•	•
<b>DOOR THICKNESS</b>	2" (5.1cm)	2" (5.1cm)
<b>MINIMUM WIDTH</b>	2'	2'
<b>MAXIMUM WIDTH</b>	24' 2"	12' 2"
<b>SECTION HEIGHTS<sup>1</sup></b>	18", 21", 24"	21", 24"
<b>MINIMUM HEIGHT</b>	6'	6'
<b>MAXIMUM HEIGHT</b>	20' 1"	12' 1"
<b>WIND LOAD<sup>2</sup> AVAILABLE</b>	•	•
<b>FINISH WARRANTY<sup>3</sup></b>	5 Year / 3 Year	5 Years
<b>WORKMANSHIP/HARDWARE WARRANTY<sup>3</sup></b>	1 Year	1 Year

<sup>1</sup> For complete door height configuration chart, visit [amarr.com](http://amarr.com) or contact your local Amarr dealer.

<sup>2</sup> It is your responsibility to make sure your garage door meets local building codes.

<sup>3</sup> For complete warranty details, visit [amarr.com](http://amarr.com) or contact your local Amarr dealer.

## AIR INFILTRATION PERFORMANCE Amarr 3552 only.

- Complies with ASHRAE® 90.1 and IECC® requirements for maximum air leakage for fenestration assemblies with a third-party certified test value of less than 0.40 cfm/ft<sup>2</sup>.
- Complies with California Title 24 requirements for maximum air leakage for fenestration assemblies with a third-party certified test value not exceeding 0.30 cfm/ft<sup>2</sup>.

## GLAZING OPTIONS Amarr 3502 not available in 1/4" or insulated glass.

	SINGLE PANE										INSULATED			
	Tempered				Lami-nated	Polycarbonate			Acrylic			Tempered		
	1/8"*	1/8" Low-E*	1/4"	1/4" Low-E	1/4"	Single 1/8"	Single 1/4"	Single 1/2"	Tri-Wall 3/8"	1/8"	1/4"	1/2"	1/2"*	1/2" Low-E*
CLEAR	STD	•	•	•	•	•	•	•	•	•	•	•	•	•
OBSCURE	•												•	•
GREEN	•												•	•
BRONZE	•								•				•	•
GRAY	•												•	•
GREYLITE	•												•	•
FROST	•		•						•				•	
SNOW					•				•					
WHITEOUT					•									
BLACK ICE					•									


\*Also available in Annealed glass.

Sectional door products from Amarr Company may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Amarr as word and logo are trademarks belonging to Amarr Company, owned by ASSA ABLOY. Door specifications and technical data subject to change without notice.

©ASSA ABLOY Printed in USA Form #6220822/5M/SPR

Part of ASSA ABLOY

## PANEL OPTIONS Amarr 3502 available in single Aluminum only.



ALUMINUM & INSULATED ALUMINUM

PERFORATED ALUMINUM  
0.312" square perforations on 1/2" centers.

LOUVERED ALUMINUM  
6 columns of (12) 3" x 3/4" vents on a 4' x 24" panel.

## COLORS Actual color may vary from samples shown.

### In Stock

#### ANODIZE



CLEAR (AN)

Amarr 3502 available in Clear anodize only.



DARK BRONZE (AD)



BLACK (BA)

#### PAINT



WHITE Powder Coat (WH)

### Special Order

#### ANODIZE



CHAMPAGNE (AH)



COPPER (AC)



MEDIUM BRONZE (AM)

Longer lead time and price upcharge apply.


#### PAINT

PVDF (Kynar®) & Powder Coat


Longer lead time and price upcharge apply.



WHITE (PVDF)




BONE WHITE



IVORY



SANDSTONE



BURNT SUN



SIERRA TAN



BEIGE



LIGHT SEAWOLF BEIGE



DOVE GRAY



SLATE GRAY



CHARCOAL GRAY



PATINA GREEN



DARK IVY



HARTFORD GREEN



MILITARY BLUE



INTERSTATE BLUE



COLONIAL RED



BOYSENBERRY



SAGE BROWN



QUAKER BRONZE



SUPER BLACK



CARNIVAL RED II†



CLASSIC COPPER†



CHAMPAGNE PEARL†



PEWTER†



SILVER†

†PVDF only.



	PVDF (Kynar®)	Powder Coat
FADE RESISTANT	++	+
CORROSION RESISTANT	++	+
UV RESISTANT	++	+
ABRASION RESISTANT	+	++
STANDARD COLORS	26	21
RAL/CUSTOM COLORS PRICE UPCHARGE	\$	\$\$
TOUCH-UP PAINT	Included	NOT included

Anodize, PVDF & standard Powder coat colors have 5 year finish warranty; RAL & Custom Powder Coat colors have 3 year finish warranty.

**Amarr Company**  
165 Carriage Court  
Winston-Salem, NC 27105  
800.503.DOOR  
[www.amarr.com](http://www.amarr.com)



YOUR LOCAL AMARR DEALER: